




Flat- and round cables for festoon systems - KYFLTCY (EMC-type)
PVC-flat cable with suspension element

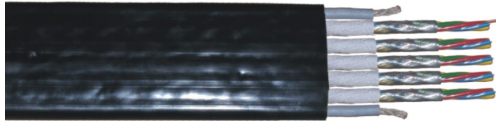

Technical attributes

Standards	according to DIN VDE 0281 with DIN VDE 0295
Conductor standard	5
Conductor category	5-, 20- and 28-wire special colour, wire with numbering according and one wire gn/ye
Core colours	PVC
Outer sheath	black
Outer sheath colour	-25 °C
Temperature range min., mobile operation	+70 °C
Temperature range max., mobile operation	-40 °C
Temperature range min., fixed installation	+70 °C
Temperature range max., fixed installation	
Nominal voltage U ₀ /U	300/500 V
RoHS-compliant	yes

Description

As power and control lines, particularly in hoists, transport equipment, machine tools, cranes and container cranes, etc., with medium mechanical stresses and operationally strong bends in one plane, in dry, damp and wet rooms. Because the copper shielding to prevent undue influence by electromagnetic interference.

Note

PVC-flat cable with suspension element

Product table

product number	product name	Weight ca. [kg]	Cu-weight [kg_km]	Outer sheath colour
00809001	KYFLTCY 28 x 1	on request	462,00	black