

Fibre optic - festoon cable

BiTfiber[®] Festoon




Application: Flexible fiber optic cable for signal and data transmission in cable festoon applications for long distances.

Standards:

- single-mode optical fiber E9/125 acc. to
 - ITU-T G.652 D - OS2
 - DIN EN IEC 60793-2-50 / VDE 0888-325
- graded-index 62.5/125 µm multimode fiber acc. to
 - DIN EN IEC 60793-2-10 A1-OM1
 - IEEE 802.3 Gigabit Ethernet Standard
 - VDE 0888-321
- graded-index 50/125 µm multimode fiber acc. to
 - DIN EN IEC 60793-2-10 A1-OM2 – OM4
 - ITU-T G.651
 - VDE 0888-321

Construction and technical data:

Standard:	DIN VDE 0888, DIN VDE 0207-21
Sheathing material:	rubber 5GM5
Colour of outer sheath:	orange
Flame-retardant:	VDE 0482-332-1-2/IEC 60332-1-2
Oil-resistant:	EN 60811-404
Permitted outer cable temperature, fixed, °C:	-40 - +80 °C
Permitted outer cable temperature, moved, °C:	-30 - +80 °C
Operating speed festoon, m/min.:	240 m/min.

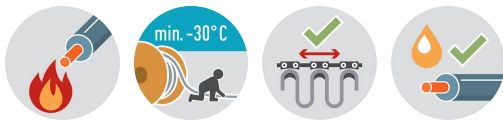

The products and information presented here are for technical calculation only. They are subject to technical progress and in no way represent the ability of shipment. Outer diameters are approximately.

BiTfiber[®] Festoon

Core identification: DIN EN 60304

part no.	part name	Number of fibres [n]	Rbb [mm]	Ø [mm]	Fzd [N]	G [kg]	
073497	2X12E9/125	24	125	12	2000	130	singlemode/multimode

part no.	part name	Number of fibres [n]	Rbb [mm]	Ø [mm]	Fzd [N]	G [kg]	
073498	2X12G50/125	24	125	12	2000	130	singlemode/multimode
073499	2X12G62,5/125	24	125	12	2000	130	singlemode/multimode
073543	2X12G50/125 OM4	24	125	12	2000	120	singlemode/multimode

Number of fibres	Number of fibres
Rbb	Bending radius, moving application
Ø	outer diameter approx.
Fzd	Tensile strength (dynamic)
G	net weight per 1000