

Profi-bus cable

L2-FIP, DP, FMS 150, EFK




DERZEIT KEIN BILD VERFÜGBAR. | NO IMAGE AVAILABLE.

Application: Profibus is an international fieldbus-standard for universal application in production and process automation. For application in drag chains.

Construction and technical data:

Conductor material:	copper, bare
Insulation:	foam skin
Screen:	aluminium foil + tinned copper braid
Sheathing material:	polyurethan
Colour of outer sheath:	violet
Flame-retardant:	VDE 0482-332-1-2/IEC 60332-1-2
Halogen-free:	yes
Oil-resistant:	yes
For outdoor use:	yes
Permitted outer cable temperature, fixed, °C:	-40 - +80 °C
Bending radius, fixed installation:	8 x Ø
Impedance:	150 Ohm

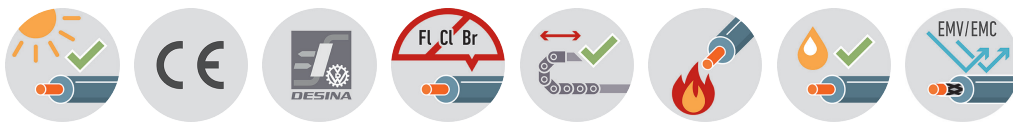

The products and information presented here are for technical calculation only. They are subject to technical progress and in no way represent the ability of shipment. Outer diameters are approximately.

FIELD- and PROFIBUS cable

Maximum operating capacity:	30 nF/km
Core identification:	red, green
peak operating voltage, V:	250 V

part no.	part name	Ø [mm]	Cu	G [kg]
100578	Profibus drag chain cable PUR L2/FIP/DP/FMS 1X2X0.64 VI	8.1	29	64

Ø	outer diameter approx.
Cu	Copper weight (GER)
G	net weight per 1000