


type number: **DSU 100** for width of the cable tray 50, 75, 100 mm
DSU 200 for width of the cable tray 150, 200 mm
DSU 300 for width of the cable tray 300 mm

product description: DSU holders are designed for fixing cable trays to sloping structures up to a 45° angle.
 The end of the holder needs to be fixed to the wall or ceiling using ZT threaded rod.
 DTBS holders are supplied only to order.

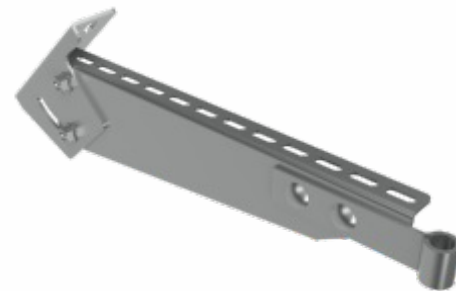

configuration: PO - Pre-Galvanized, zinc-layer 15 - 27 µm
 POF - Hot Dip Galvanized, zinc-layer 55 µm (min. 45 µm)

sales amount: á 1 pc

classification: ČSN 73 0895
 ZP 27/2008 P 90-R
 DIN 41012-12 E90
 STN 92 0205 PS 90
 Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire.

storage: EN 60721-3-1

