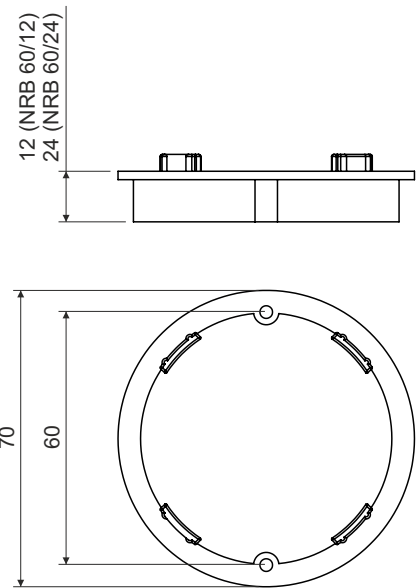


**extending frame into concrete**
**NRB 60/12**  
**NRB 60/24**


product description: height adjustment when applying plaster  
 suitable for mounting on the covers KBV-1; KBV-2; KBV-2/71; KBV-3

material: PE (halogen-free)

color: orange

self-snuffing: no

temperature resistance: -5 - +60 °C (short-time +90 °C)

flaming loop test: 650 °C

fire class for underlying material: A1

weight: NRB 60/12 = 7 g; NRB 60/24 = 11 g

certification: EN 60 670-1

storage: ČSN 64 0090

configuration: NRB 60/12: configuration AB - 10 extending frames packed in foil, labeled; 340 extending frames in cardboard  
 NRB 60/24: configuration AB - 10 extending frames packed in foil, labeled; 160 extending frames in cardboard