


elbow 90°

type number	for width of cable tray	for height of cable tray	B	thickness of metal sheet
O 90X35X50	50	35	250	0,8
O 90X35X75	75	35	275	0,8
O 90X35X100	100	35	300	0,8
O 90X35X150	150	35	350	0,8
O 90X35X200	200	35	400	1,0
O 90X35X300	300	35	500	1,0
O 90X35X400	400	35	600	1,0
O 90X35X500	500	35	700	1,0
O 90X35X600	600	35	800	1,0
O 90X60X50	50	60	250	0,8
O 90X60X75	75	60	275	0,8
O 90X60X100	100	60	300	0,8
O 90X60X150	150	60	350	0,8
O 90X60X200	200	60	400	1,0
O 90X60X300	300	60	500	1,0
O 90X60X400	400	60	600	1,0
O 90X60X500	500	60	700	1,0
O 90X60X600	600	60	800	1,2
O 90X85X100	100	85	300	0,8
O 90X85X150	150	85	350	0,8
O 90X85X200	200	85	400	1,0
O 90X85X300	300	85	500	1,0
O 90X85X400	400	85	600	1,0
O 90X85X500	500	85	700	1,0
O 90X85X600	600	85	800	1,2
O 90X110X150	150	110	350	0,8
O 90X110X200	200	110	400	1,0
O 90X110X300	300	110	500	1,0
O 90X110X400	400	110	600	1,0
O 90X110X500	500	110	700	1,0
O 90X110X600	600	110	800	1,2

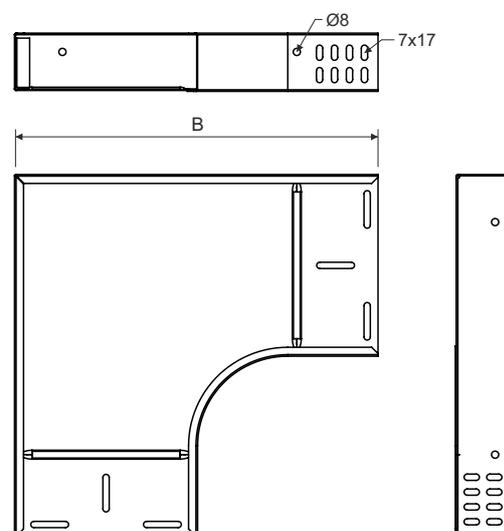

product description: The elbow 90° is used to bend cable trays running through JUPITER cable trays or cable ladders by 90° in a horizontal direction. From the width of 400 mm the outer right angle of the side walls is replaced by skewed cut. To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray. A bolt with a GMT surface finish is used for a tray with an F surface finish. The elbow 90° may be supplied in polyester varnish (varnish layer 60, 100 µm).

configuration: S - Pre-Galvanized, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized, zinc-layer 45 µm (min. 35 µm)
 EO - epoxy coating for indoor environment, along the perimeter, 60 µm
 EC - epoxy coating for indoor environment, - total paint, 60 µm

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1

