

reduktion piece

type number: **SU 35** for height of cable tray 35 mm
SU 60 for height of cable tray 60 mm
SU 85 for height of cable tray 85 mm
SU 110 for height of cable tray 110 mm

thickness of metal sheet: 1,0 mm


product description: It is used for making an additional branching use an unequal T-piece or cross.
 Advantage of this using is availability to choose bending tray with any width.
 The reduction piece is delivered in singles, must be used 2 pieces for installation.
 The connection is performed using the bolts NSM 6X10.
 To protect the cables, the bolt head is inside the cable tray.
 A bolt with a GMT surface finish is used for a tray with an F surface finish.
 The reduction piece may be supplied in polyester varnish (varnish layer 60, 100 µm).

configuration: S - Pre-Galvanized, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized, zinc-layer 50 - 100 µm
 EC - epoxy coating for indoor environment, - total paint, 60 µm

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1

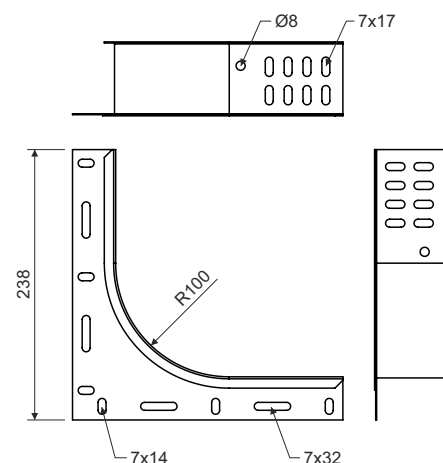

length of cut out side wall of the tray for branch

width of cable tray	D
50	250
100	300
150	350
200	400
300	500
400	600
500	700
600	800

