

## coupling

item number:	<b>S 35X200</b>	height (H) 25 mm
	<b>S 60X200</b>	height (H) 50 mm
	<b>S 85X200</b>	height (H) 75 mm
	<b>S 110X200</b>	height (H) 100 mm

length: 200 mm


thickness of metal sheet: 1,2 mm

product description: The coupling is used to connect JUPITER cable trays or cable ladders.

The connection is performed using the bolts NSM 6X10. To get conductive connection use screws NSMP 6X10. To protect the cables, the bolt head is inside the cable tray.

Coupling and bolt with a GMT surface finish is used for a tray with an F surface finish.

The coupling may be supplied in polyester varnish (varnish layer 60, 100  $\mu\text{m}$ ).

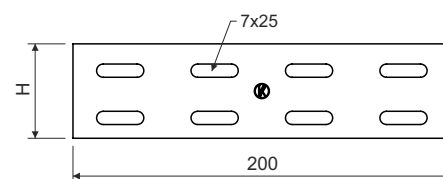

configuration: S - Pre-Galvanized, zinc-layer 15 - 27  $\mu\text{m}$   
 GMT - non electrolytic plating, aluminum-zinc-layer 5-15  $\mu\text{m}$   
 (equivalent Hot Dip Galvanized)  
 EC - epoxy coating for indoor environment, - total paint, 60  $\mu\text{m}$

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1

