
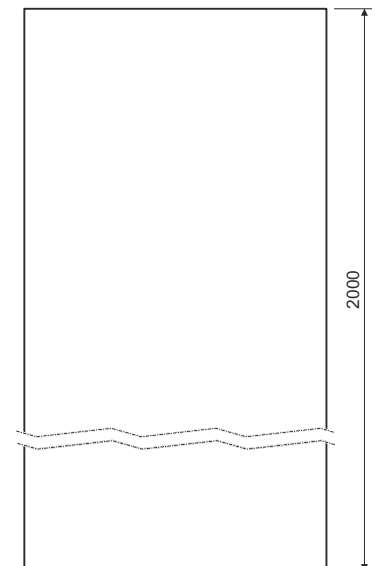


cable tray cover

item number	for width of cable tray A	height H	thickness of metal sheet
V 40	40	10	0,55
V 50	50	11	0,55
V 62	62	11	0,55
V 75	75	11	0,55
V 100	100	11	0,55
V 125	125	11	0,55
V 150	150	11	0,55
V 200	200	11	0,55
V 250	250	11	0,55
V 300	300	11	0,80
V 400	400	14	1,00
V 500	500	14	1,00
V 600	600	14	1,20



product description: The cable tray cover is used to cover cable trays.
 The standard length of the cable tray cover is 2 m.
 Mentioned thickness of the metal plate is just orientation.
 We recommend cable tray cover Hot-Dip Galvanized in 0,8-1,2 mm thick steel plate.
 The fixing of the cover to the tray is done using the cover fixture VU (2 pcs per meter), except for V 40. The V 40 cover may be alternatively fixed using a clamping belt.
 The cover may be supplied in polyester varnish (varnish layer 60, 100 µm).

configuration: S - Pre-Galvanized, zinc-layer 15 - 27 µm
 F - Hot Dip Galvanized, zinc-layer 45 µm (min. 35 µm)
 EO - epoxy coating for indoor environment, along the perimeter, 60 µm
 EC - epoxy coating for indoor environment, - total paint, 60 µm

sales amount: á 2000 mm

certification: ČSN EN 61537:02

storage: ČSN EN 60721-3-1