


type number	for width of cable tray	height H	thickness of metal sheet	weight kg/ps
K 35X50_S	50	30	1,0	0,028
K 35X50_F				0,033
K 35X75_S	75	30	1,0	0,034
K 35X75_F				0,039
K 35X100_S	100	30	1,0	0,040
K 35X100_F				0,046
K 35X150_S	150	30	1,0	0,052
K 35X150_F				0,060
K 35X200_S	200	30	1,0	0,064
K 35X200_F				0,074
K 35X300_S	300	30	1,0	0,088
K 35X300_F				0,102
K 35X400_S	400	30	1,0	0,112
K 35X400_F				0,130
K 35X500_S	500	30	1,0	0,136
K 35X500_F				0,158
K 35X600_S	600	30	1,0	0,160
K 35X600_F				0,186
K 60X50_S	50	55	1,0	0,052
K 60X50_F				0,060
K 60X75_S	75	55	1,0	0,063
K 60X75_F				0,076
K 60X100_S	100	55	1,0	0,074
K 60X100_F				0,086
K 60X150_S	150	55	1,0	0,096
K 60X150_F				0,110
K 60X200_S	200	55	1,0	0,118
K 60X200_F				0,137
K 60X300_S	300	55	1,0	0,162
K 60X300_F				0,188
K 60X400_S	400	55	1,0	0,206
K 60X400_F				0,239
K 60X500_S	500	55	1,0	0,250
K 60X500_F				0,290
K 60X600_S	600	55	1,0	0,294
K 60X600_F				0,341
K 85X100_S	100	80	1,0	0,107
K 85X100_F				0,124
K 85X150_S	150	80	1,0	0,139
K 85X150_F				0,161
K 85X200_S	200	80	1,0	0,171
K 85X200_F				0,198
K 85X300_S	300	80	1,0	0,235
K 85X300_F				0,272
K 85X400_S	400	80	1,0	0,299
K 85X400_F				0,347
K 85X500_S	500	80	1,0	0,363
K 85X500_F				0,421
K 85X600_S	600	80	1,0	0,427
K 85X600_F				0,495
K 110X150_S	150	105	1,0	0,183
K 110X150_F				0,212
K 110X200_S	200	105	1,0	0,225
K 110X200_F				0,261
K 110X300_S	300	105	1,0	0,309
K 110X300_F				0,358
K 110X400_S	400	105	1,0	0,393
K 110X400_F				0,456
K 110X500_S	500	105	1,0	0,477
K 110X500_F				0,550
K 110X600_S	600	105	1,0	0,560
K 110X600_F				0,651

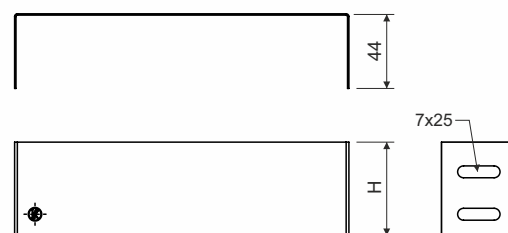

product description: The end-piece is used to cover the end of cable trays running through JUPITER cable trays.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

A bolt with a GMT surface finish is used for a tray with an F surface finish.

These items can also be ordered in a varnished version.

surface finish: S - Pre-Galvanized, zinc-layer 13 - 27 µm
 F - Hot Dip Galvanized according to EN ISO 1461, zinc-layer 45 µm (min. 35 µm)

sales amount: á 1 pc

certification: EN 61537:02

storage: EN 60721-3-1