
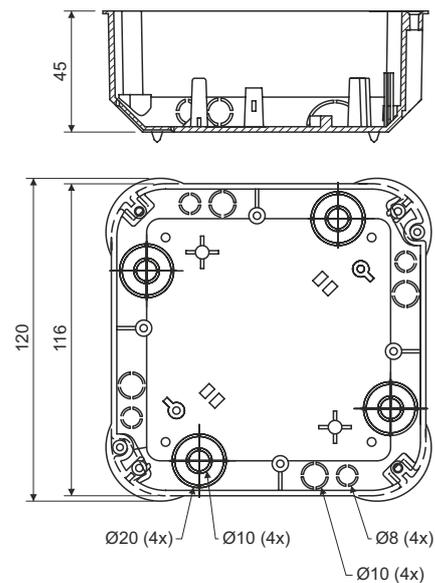


KO 110/L

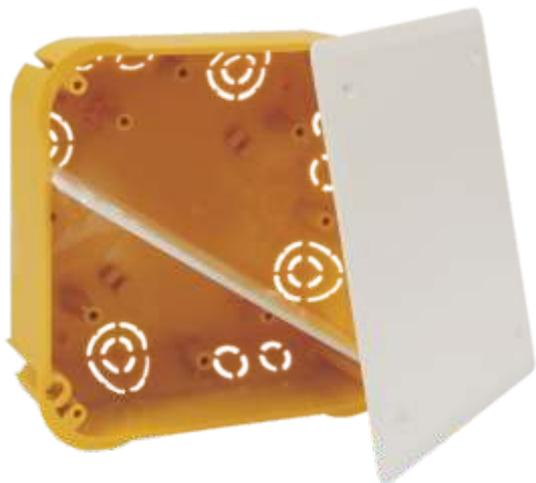

				400	16
	S-96	SP-96		S-66,	
				400	

	()	
	30	
	-5 - +60 °C	
	850 °C	
	A1-F	
	165	
	EN 60 670-1	

accessories:	S-96; S-96; SP-96
	TYP015, TYP016, TYP017, TYP018

	I VPT 40	
	VPTU	
	VPTU	