
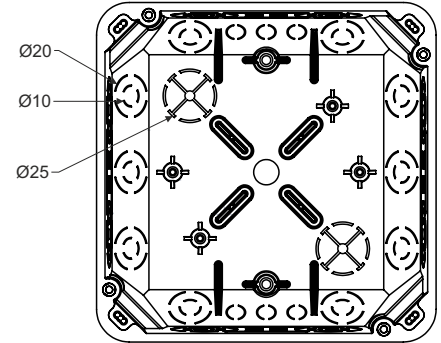


KO 125/1L

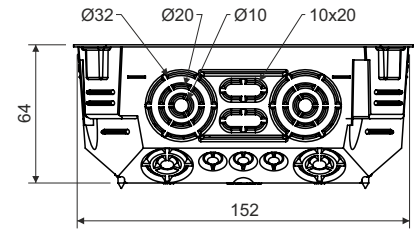

400

16

TS35

()

30
: -5 - +60 °C
: 850 °C

: A1-F

: 245

: EN 60 670-1

S-96; S-96; SP-96

EPS 2

TYP015, TYP016, TYP017, TYP018

TS35

VPT 40

VPTU

P1