
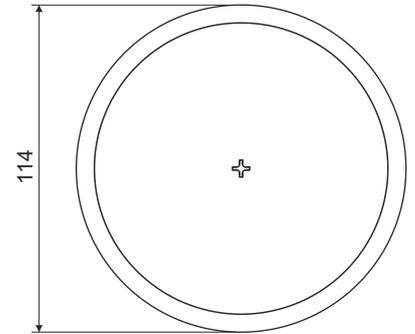


## KO 97 V/1

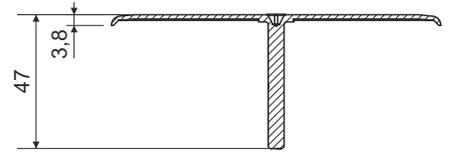

KO 97/5, KO 97/L, KR 97/5, KR 97/L, KOM 97, KOM 97/L

RAL 9003

30

-5 - +60 °C

850 °C

A1-F

26

EN 60 670-1