


KOPOFLEX®

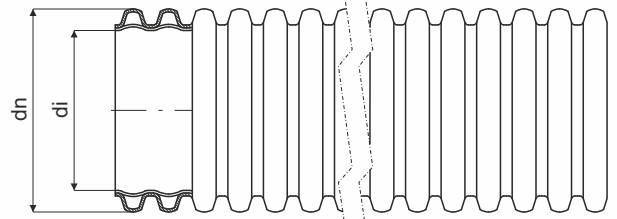

product description: antistatic, antibacterial, halogen-free flexible double-walled corrugated protection pipe designed for air-conditioning systems in buildings is used for air distribution
 the ends of the protection pipes are terminated with closing plugs against contamination
 the product may be subject to ordinary surface mechanical damage (marks, dents, scratches and rib deformation) of the outer wall of the pipe due to manufacturing technology or transport, which do not affect the functionality of the product

material: antistatic and antibacterial HDPE without recycle
 halogen-free: **yes**
 self-snuffing: **no**
 thermal resistance: -5 - +60 °C
 fire class for underlying material: A1
 UV stable: **no**
 mechanical resistance: min. 200N
 volume resistivity ρ : 7,36E+14 Ω .m
 surface resistivity σ : 6,28E+14 Ω
 certification: EN ISO 846 - method A, EN ISO 846 - method C, ČSN IEC 93:93, ČSN EN 17192
 government regulation: NV 163/2002 Sb.
 construction industry certification: STO - AO 224 - 990/2019
 storage: ČSN 64 0090
 length tolerance: \pm 1%

accessories: couplings, sealing rings, closing plugs

chemical resistance: YES: acetone, ammonia 25%, distilled water, ethanol 50%, sodium hydroxide 60%, hydrofluoric acid 40%, acetic acid 5%, sulfuric acid 96%, medicinal oil, methanol, olive oil, petroleum, hydrogen peroxide 20%, transformer oil, sodium carbonate
 NO: aniline, chlorinated hydrocarbons, tetrachlorocarbon

item number	dn outer Ø (mm)	di min. inner Ø (mm)	min. bending radius (mm)	length = package (m)	package dimension (cm)	weight (kg/package)	colour outer	colour inner
KF 09063_PLCA	63	52	350	50	95x35	11,0	blue	white
KF 09075_PLCA	75	61	350	50	110x40	15,5	blue	white
KF 09090_PLCA	90	75	400	50	120x45	19,0	blue	white

Pressure loss per 1 meter

