


# KP 64/2

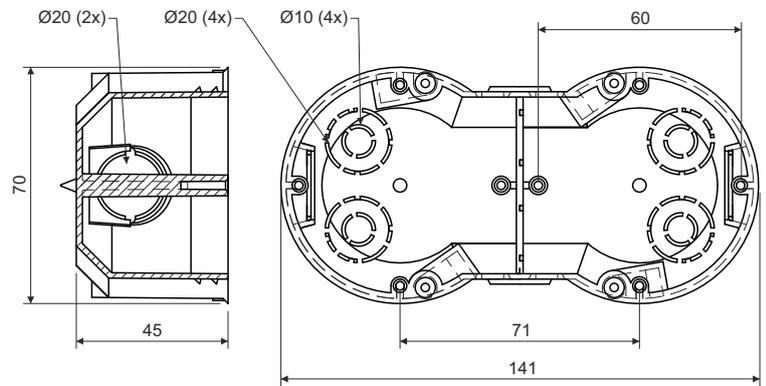

400

16

( 71 )

30  
 : -5 - +60 °C  
 : 850 °C  
 : A1-D

: 71

: EN 60 670-1

VKP 64/2L

NR 68/6, NR 68/10

TYP015, TYP016, TYP017, TYP018

FR 68 SDS