


KP 68

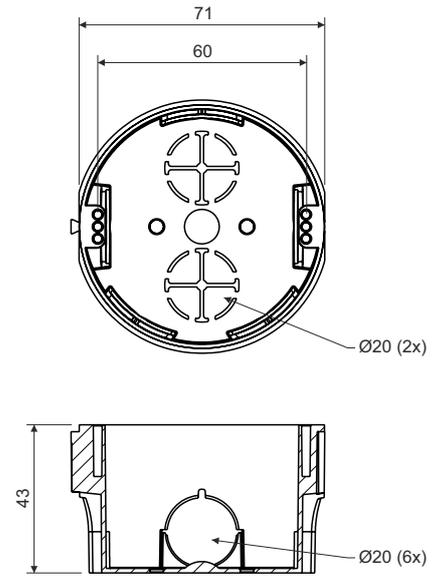

: 3 400 16
 : 71
 KU 68-1901, KP 68/2 KPR 68

: 30
 : -5 - +60 °C
 : 850 °C
 : A1-D
 : 29
 : EN 60 670-1

: V 68
 ZV 68
 NR 68/6, NR 68/10
 TYP015, TYP016, TYP017, TYP018

FR 68 SDS