
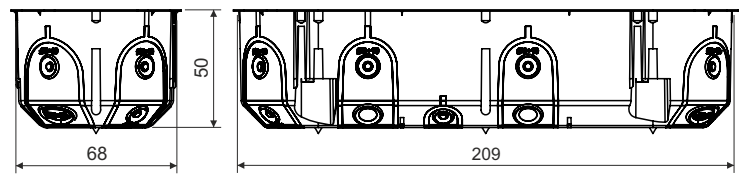


KPL 64-50/3LD

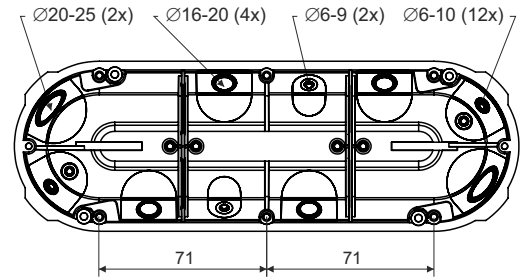

400

16

(4x Ø16-20 , 2x Ø20-25 mm, 12x Ø6-10 mm, 2x Ø6-9 mm)

()

30
 : -5 - +60 °C
 : 850 °C
 : A1-F

: 90

: EN 60 670-1

TYP015, TYP016, TYP017, TYP018

VPT 64

VPTU