
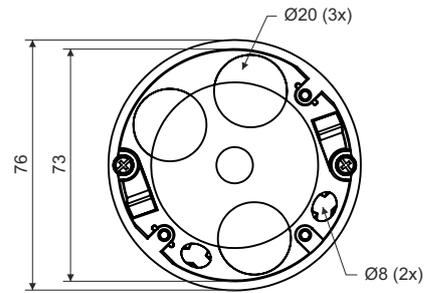


KU 68 LD/1HF



400

16

V 68HF

IP

IP30

(71)

(,)

30
: -5 - +60 °C
: 850 °C

: A1-F

: 26

: EN 60 670-1

accessories:

V 68HF

S-66

TYP015, TYP016, TYP017, TYP018

VDS 68 (

VPTU +

VPT 68 +