
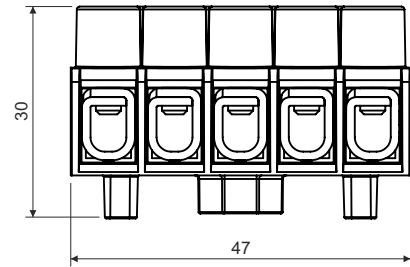


S-KSK 1

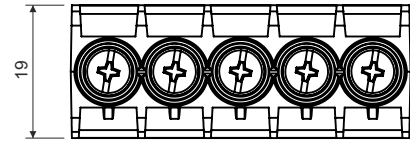

KSK 80 KSK 100

500

4-

²

1,5-2,5

²

3²

4

².

RAL 7035

30

-40 - +85 °C

850 °C

A1-F

19

EN 60998-1